



# Innlights<sup>TC</sup>

Rent & Buy LED Displays



## InnScreen S4

[ PIXEL PITCH 4,8 mm ] Indoor  
// Fixed Installation Indoor

3 cabinet sizes with free combination.

Most reliable fixed installation cabinet with brilliant video performance.

Light profile.  
Front and rear service.  
Magnetic design with push & pull function.

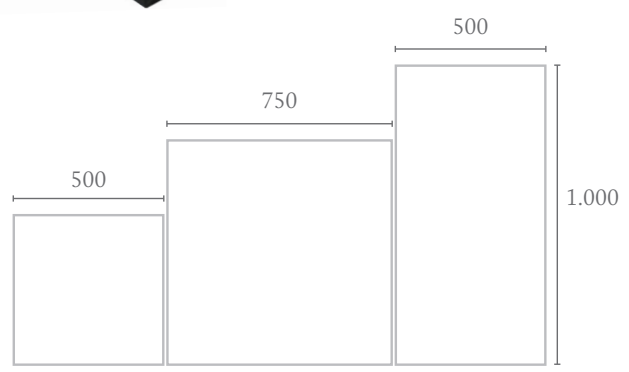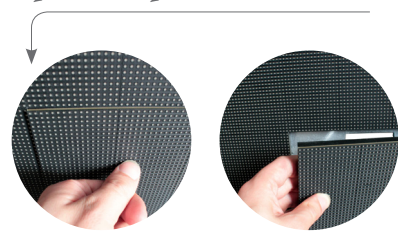

### FACTS [m<sup>2</sup>]

BRIGHTNESS [cd/m <sup>2</sup> ]	1.300
WEIGHT [kg/m <sup>2</sup> ]	23 - 26
RESOLUTION [pixel/m <sup>2</sup> ]	208 x 208
WATTAGE MAX./AVG. [W/m <sup>2</sup> ]	480 / 160

SALES



# Innlights<sup>TC</sup>

Rent & Buy LED Displays

## InnScreen S4 // Customized

### PHYSICAL FACTS

PIXEL PITCH [mm]	4,8
BRIGHTNESS [cd/m <sup>2</sup> ]	1.300
PROTECTION LEVEL	30
CABINET MATERIAL	Aluminum sheet

<b>CABINET SIZE [mm]</b>	<b>500 x 500 x 80</b>
CABINET RESOLUTION [px]	104 x 104
CABINET WEIGHT [kg]	6,5

<b>CABINET SIZE [mm]</b>	<b>750 x 750 x 80</b>
CABINET RESOLUTION [px]	156 x 156
CABINET WEIGHT [kg]	11,5

<b>CABINET SIZE [mm]</b>	<b>500 x 1.000 x 80</b>
CABINET RESOLUTION [px]	104 x 208
CABINET WEIGHT [kg]	11,5

### INNLIGHTS CUSTOMIZED

IC Driver

LED Specification

### INNLIGHTS INTEGRATION

Special Construction & Installation

Framework Design

Digital Signage Advising & Creating

Digital Signage via Online Remote

Monitoring Solutions

Permissions Support

### OPTICAL FACTS

VIEWING ANGLE HOR/VER [Deg]	140 / 120
REFRESH RATE [Hz]	1.920
IC DRIVER	Macroblock MBI
SCAN MODE	1 / 8
LED TYPE	SMD 3528
LED CHIP	Epistar (R) / Silan (G,B)
LED ENCAPSULATION	NationStar
GREY LEVEL [bit]	12
VIDEO PROCESSING	Novastar

### POWER SUPPLY

INPUT VOLTAGE [V]	110 - 240
WATTAGE MAX./AVG. [W /m <sup>2</sup> ]	480 / 160

### ENVIRONMENT

OPERATION HUMIDITY [RH]	10% - 90%
WORKING TEMP. MIN./MAX. [°C]	0 / +45

